

SERIE 14

30YML

AVO - Wheel with avolan polyurethane and steel castor for industry,
diameter 200mm ean 28186

Material: Avolan
Polyurethane

Core: Cast
Iron

Application field:
Industry

Description:

Wheel coated with cast Polyurethane tread AVOLAN 91 Shore A and mechanical black painted cast iron centre. Hub on shielded ball bearings assembled with central spacer.

Extra Heavy-Duty Castors:


Made of pressed and welded high thickness steel, turning on thrust and tapered roller bearings, with plate. Black epoxy paint. Steel spring mechanism.

Product line: Polyurethane

EAN13:8018793281867

EAN5:28186

Article code:21M300L200LCU

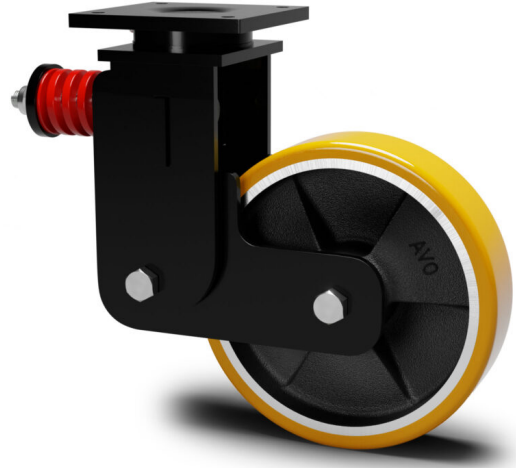

Features

Minimum temperature: -20

Maximum temperature: 80

Dynamic load capacity: 1100 DaN

Rotation: Ball bearing

Hardness scale: Shore A

Hardness: 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	200
Band width (mm)	50
Hub width (mm)	60
Hub version	Ball bearing
Wheel hole (mm)	20
Bearing seat (mm)	52X15
Dynamic load capacity (DaN)	1100
Colour	Yellow
Material	Avolan Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	175X140
Plate hole spacing (mm)	140X105
Plate hole size (mm)	14
Offset (mm)	115
Ground clearance (mm)	275
Castor hole (mm)	/
Static load capacity (DaN)	1400
Structure	Swivel
Version	Spring-Loaded
Brake	/
Plain axle	/
Stem type	/
Finishing	Black painted