

SERIE 14-FP

14-FP

AVO - Wheel with avolan polyurethane for industry, diameter 125mm ean 27024


Material: Avolan Polyurethane **Core:** Steel **Application field:** Industry

Description:

Press-on band made of AVOLAN Polyurethane, 91 Shore A with steel core and plain bore hub. Designed to absorb vibrations and impacts effectively, improving the stability of the bracket and reducing dynamic stresses during operation. The calibrated inner seat ensures precise mounting and maintains a consistent elastic response even under varying load conditions.

Product line: Polyurethane

EAN13:8018793270243 **EAN5:**27024 **Article code:**090141012550U

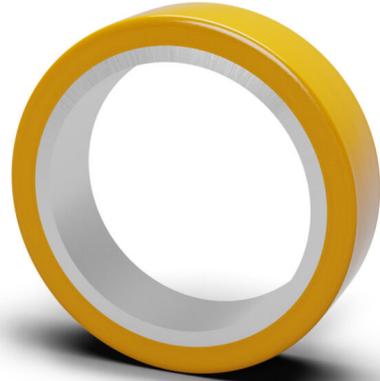

Features

Minimum temperature: -20 **Maximum temperature:** 80 **Dynamic load capacity:** 500 DaN
Rotation: Plain bore **Hardness scale:** Shore A **Hardness:** 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	125
Band width (mm)	50
Hub width (mm)	50
Hub version	Plain bore
Wheel hole (mm)	100
Bearing seat (mm)	FORO 100
Dynamic load capacity (DaN)	500
Colour	Yellow
Material	Avolan Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	/
Plate hole spacing (mm)	/
Plate hole size (mm)	/
Offset (mm)	/
Ground clearance (mm)	/
Castor hole (mm)	/
Static load capacity (DaN)	/
Structure	/
Version	/
Brake	/
Plain axle	/
Stem type	/
Finishing	/