

SERIE 14CH

14CH

AVO - Wheel with avolan polyurethane for industry, diameter 200mm ean 25608


Material: Avolan Polyurethane **Core:** Steel **Application field:** Industry

Description:

Heavy duty drive wheel coated with cast Polyurethane AVOLAN 91 Shore A and black painted mechanical cast iron, aluminium or steel centre. Hub with keyway according to DIN6885.

Product line: Polyurethane

EAN13:8018793256087 **EAN5:**25608 **Article code:**09014CH20041U

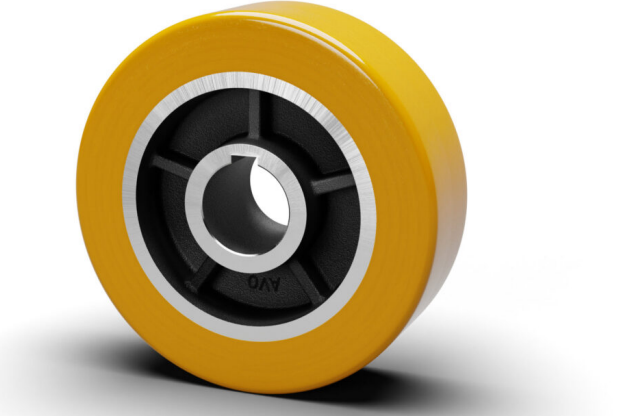

Features

Minimum temperature: -20 **Maximum temperature:** 80 **Dynamic load capacity:** 1100 DaN
Rotation: Plain bore **Hardness scale:** Shore A **Hardness:** 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	200
Band width (mm)	40
Hub width (mm)	40
Hub version	Plain bore
Wheel hole (mm)	30
Bearing seat (mm)	FORO 30
Dynamic load capacity (DaN)	1100
Colour	Yellow
Material	Avolan Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	/
Plate hole spacing (mm)	/
Plate hole size (mm)	/
Offset (mm)	/
Ground clearance (mm)	/
Castor hole (mm)	/
Static load capacity (DaN)	/
Structure	/
Version	/
Brake	/
Plain axle	/
Stem type	/
Finishing	/