

SERIE 15

# 30ML

**AVO - Wheel with avoprene polyurethane and steel castor for industry, diameter 200mm ean 28189**

**Material:** Avoprene  
Polyurethane

**Core:** Cast  
Iron

**Application field:**  
Industry

**Description:**

Wheel coated with cast Polyurethane tread AVOPRENE 91 Shore A and mechanical black painted cast iron centre. Hub on shielded ball bearings assembled with central spacer.

**Extra Heavy-Duty Castors:**


Made of pressed and welded high thickness steel, turning on thrust and tapered roller bearings, with plate. Black epoxy paint. Steel spring mechanism.

**Product line:** Polyurethane

**EAN13:**8018793281898

**EAN5:**28189

**Article code:**13M300L200LCA

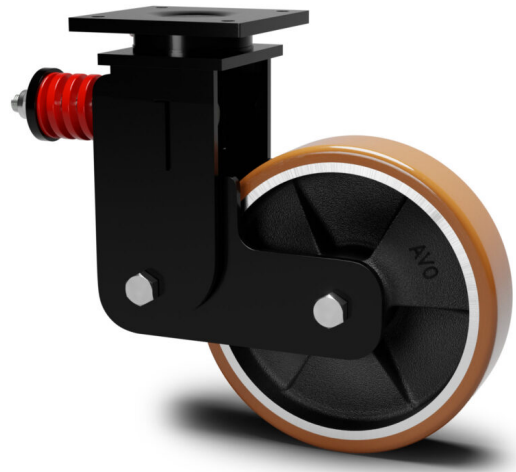

## Features

**Minimum temperature:** -20

**Maximum temperature:** 80

**Dynamic load capacity:** 1100 DaN

**Rotation:** Ball bearing

**Hardness scale:** Shore A

**Hardness:** 91

## Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

## Wheel data

|                             |                       |
|-----------------------------|-----------------------|
| Diameter (mm)               | 200                   |
| Band width (mm)             | 50                    |
| Hub width (mm)              | 60                    |
| Hub version                 | Ball bearing          |
| Wheel hole (mm)             | 20                    |
| Bearing seat (mm)           | 52X15                 |
| Dynamic load capacity (DaN) | 1100                  |
| Colour                      | Brown                 |
| Material                    | Avoprene Polyurethane |
| Box pieces                  | /                     |
| Hardness scale              | Shore A               |
| Hardness                    | 91                    |

## Support data

|                            |               |
|----------------------------|---------------|
| Plate size (mm)            | 175X140       |
| Plate hole spacing (mm)    | 140X105       |
| Plate hole size (mm)       | 14            |
| Offset (mm)                | 115           |
| Ground clearance (mm)      | 275           |
| Castor hole (mm)           | /             |
| Static load capacity (DaN) | 1400          |
| Structure                  | Swivel        |
| Version                    | Spring-Loaded |
| Brake                      | /             |
| Plain axle                 | /             |
| Stem type                  | /             |
| Finishing                  | Black painted |