

SERIE 15

30AML

AVO - Wheel with avoprene polyurethane and steel castor for industry, diameter 250mm ean 28193

Material: Avoprene Polyurethane **Core:** Cast Iron **Scope:** Industry

Description:


Wheel coated with cast Polyurethane tread AVOPRENE 91 Shore A and mechanical black painted cast iron centre. Hub on shielded ball bearings assembled with central spacer.

Extra Heavy-Duty Castors:

Made of in pressed and welded high thickness steel, fixed. Black epoxy paint. Steel spring mechanism.

Product line: Polyurethane

EAN13:8018793281935 **EAN5:**28193 **Article code:**13M30AL251LCA

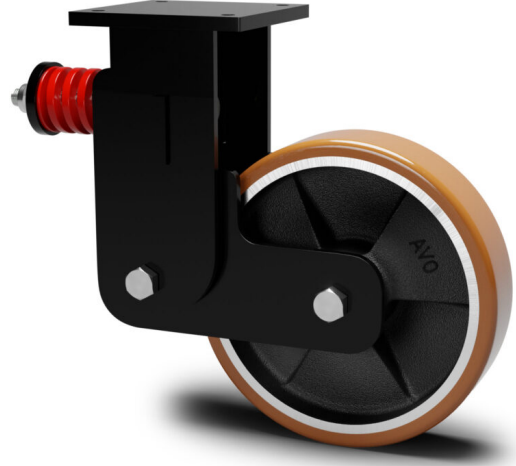

Features

Minimum temperature: -20 **Maximum temperature:** 80 **Dynamic load capacity:** 1500 DaN
Rotation: Ball bearing **Hardness scale:** Shore A **Hardness:** 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	250
Band width (mm)	60
Hub width (mm)	60
Hub version	Ball bearing
Wheel hole (mm)	25
Bearing seat (mm)	52X15
Dynamic load capacity (DaN)	1500
Colour	Brown
Material	Avoprene Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	200X160
Plate hole spacing (mm)	160X120
Plate hole size (mm)	14
Offset (mm)	/
Ground clearance (mm)	395
Castor hole (mm)	/
Static load capacity (DaN)	1750
Structure	Fixed
Version	Spring-Loaded
Brake	/
Plain axle	/
Stem type	/
Finishing	Black painted