

SERIE 15

30ML

AVO - Wheel with avoprene polyurethane and steel castor for industry, diameter 300mm ean 28191

Material: Avoprene
Polyurethane

Core: Cast
Iron

Application field:
Industry

Description:

Wheel coated with cast Polyurethane tread AVOPRENE 91 Shore A and mechanical black painted cast iron centre. Hub on shielded ball bearings assembled with central spacer.

Extra Heavy-Duty Castors:


Made of pressed and welded high thickness steel, turning on thrust and tapered roller bearings, with plate. Black epoxy paint. Steel spring mechanism.

Product line: Polyurethane

EAN13:8018793281911

EAN5:28191

Article code:13M300L300LCA

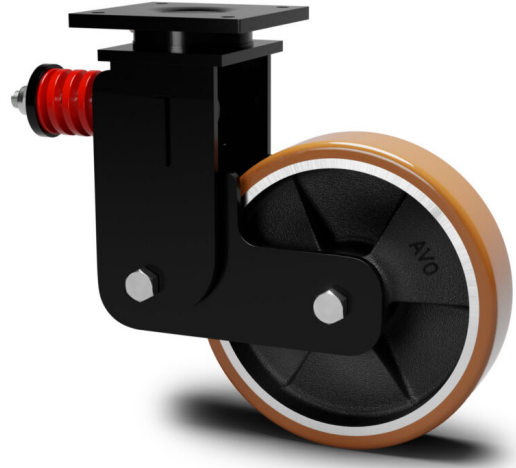

Features

Minimum temperature: -20

Maximum temperature: 80

Dynamic load capacity: 1800 DaN

Rotation: Ball bearing

Hardness scale: Shore A

Hardness: 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	300
Band width (mm)	70
Hub width (mm)	70
Hub version	Ball bearing
Wheel hole (mm)	30
Bearing seat (mm)	62X16
Dynamic load capacity (DaN)	1800
Colour	Brown
Material	Avoprene Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	200X160
Plate hole spacing (mm)	160X120
Plate hole size (mm)	14
Offset (mm)	155
Ground clearance (mm)	420
Castor hole (mm)	/
Static load capacity (DaN)	2250
Structure	Swivel
Version	Spring-Loaded
Brake	/
Plain axle	/
Stem type	/
Finishing	Black painted