

SERIE 116GR-CD

116GR-CD

AVO - Wheel with conductive polyamide for industry, diameter 200mm ean 28038

Material: Conductive Polyamide

Core: Conductive polyamide 6

Application field: Industry

Description:


Conductive Polyamide 6 wheel $R \leq 10000$ Ohm. Hub on roller bearings, shielded ball bearings assembled with central spacer, or plain bore.

Product line: Antistatic/Conductive

EAN13:8018793280389

EAN5:28038

Article code:G5116CD200GFP

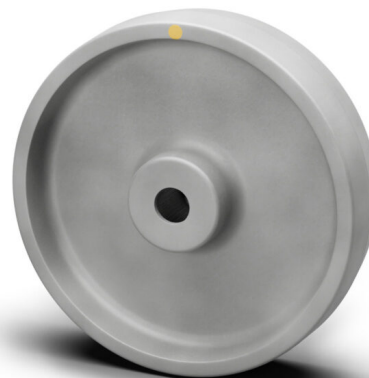

Features

Minimum temperature: -25

Maximum temperature: 85

Dynamic load capacity: 475 DaN

Rotation: Plain bore

Hardness scale: Shore D

Hardness: 82

Flooring

- Concrete
- Stoneware

Wheel data

Diameter (mm)	200
Band width (mm)	50
Hub width (mm)	58
Hub version	Plain bore
Wheel hole (mm)	20
Bearing seat (mm)	47X14
Dynamic load capacity (DaN)	475
Colour	Grey
Material	Conductive Polyamide
Box pieces	/
Hardness scale	Shore D
Hardness	82

Support data

Plate size (mm)	/
Plate hole spacing (mm)	/
Plate hole size (mm)	/
Offset (mm)	/
Ground clearance (mm)	/
Castor hole (mm)	/
Static load capacity (DaN)	/
Structure	/
Version	/
Brake	/
Plain axle	/
Stem type	/
Finishing	/