

SERIE 18ACH

# 18ACH

**AVO - Wheel with avolan polyurethane for industry, diameter 100mm ean 21935**

**Material:** Avolan  
Polyurethane

**Core:**  
Aluminum

**Application field:**  
Industry

**Description:**


Heavy duty drive wheel coated with cast Polyurethane AVOLAN 91 Shore A and black painted mechanical cast iron, aluminium or steel centre. Hub with keyway according to DIN6885.

**Product line:** Polyurethane

**EAN13:**8018793219358

**EAN5:**21935

**Article code:**09018ACH1004U

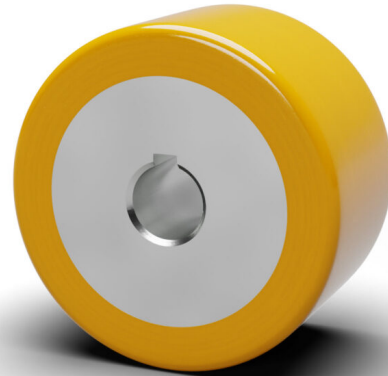

## Features

**Minimum temperature:** -20

**Maximum temperature:** 80

**Dynamic load capacity:** 300 DaN

**Rotation:** Plain bore

**Hardness scale:** Shore A

**Hardness:** 91

## Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

## Wheel data

|                             |                     |
|-----------------------------|---------------------|
| Diameter (mm)               | 100                 |
| Band width (mm)             | 40                  |
| Hub width (mm)              | 44                  |
| Hub version                 | Plain bore          |
| Wheel hole (mm)             | 15                  |
| Bearing seat (mm)           | FORO 15             |
| Dynamic load capacity (DaN) | 300                 |
| Colour                      | Yellow              |
| Material                    | Avolan Polyurethane |
| Box pieces                  | /                   |
| Hardness scale              | Shore A             |
| Hardness                    | 91                  |

## Support data

|                            |   |
|----------------------------|---|
| Plate size (mm)            | / |
| Plate hole spacing (mm)    | / |
| Plate hole size (mm)       | / |
| Offset (mm)                | / |
| Ground clearance (mm)      | / |
| Castor hole (mm)           | / |
| Static load capacity (DaN) | / |
| Structure                  | / |
| Version                    | / |
| Brake                      | / |
| Plain axle                 | / |
| Stem type                  | / |
| Finishing                  | / |