

SERIE 600

600

AVO - Wheel with avolan polyurethane for industry, diameter 200mm ean 14267

Material: Avolan
Polyurethane

Core: Electro-welded
steel

Application field:
Industry

Description:


Wheel coated with cast Polyurethane tread AVOLAN 91 Shore A and electro-welded steel centre. Hub on shielded and sealed ball bearings.

Product line: Polyurethane

EAN13:8018793142670

EAN5:14267

Article code:0906004200LCU

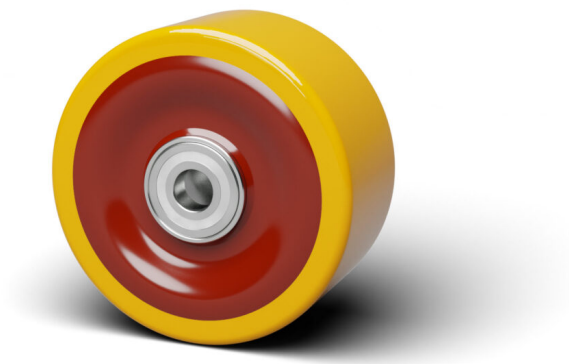

Features

Minimum temperature: -20

Maximum temperature: 80

Dynamic load capacity: 2000 DaN

Rotation: Ball bearing

Hardness scale: Shore A

Hardness: 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	200
Band width (mm)	100
Hub width (mm)	100
Hub version	Ball bearing
Wheel hole (mm)	50
Bearing seat (mm)	80X16
Dynamic load capacity (DaN)	2000
Colour	Yellow
Material	Avolan Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	/
Plate hole spacing (mm)	/
Plate hole size (mm)	/
Offset (mm)	/
Ground clearance (mm)	/
Castor hole (mm)	/
Static load capacity (DaN)	/
Structure	/
Version	/
Brake	/
Plain axle	/
Stem type	/
Finishing	/