

SERIE 14

22

AVO - Wheel with avolan polyurethane and steel castor for industry, diameter 125mm ean 15346

Material: Avolan
Polyurethane

Core: Cast
Iron

Application field:
Industry

Description:

Wheel coated with cast Polyurethane tread AVOLAN 91 Shore A and mechanical black painted cast iron centre. Hub on shielded ball bearings assembled with central spacer.

Medium duty castors:


Made of zinc-chromium plated pressed steel, turning on double rim of balls, with plate. Assembled with self-locking nut and dust cover ring on the balls.

Product line: Polyurethane

EAN13:8018793153461

EAN5:15346

Article code:09022S0125LCU

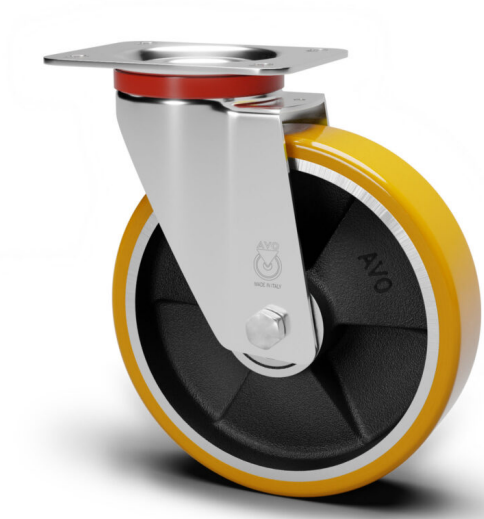

Features

Minimum temperature: -20

Maximum temperature: 80

Dynamic load capacity: 130 DaN

Rotation: Ball bearing

Hardness scale: Shore A

Hardness: 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	125
Band width (mm)	30
Hub width (mm)	30
Hub version	Ball bearing
Wheel hole (mm)	15
Bearing seat (mm)	/
Dynamic load capacity (DaN)	130
Colour	Yellow
Material	Avolan Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	100X085
Plate hole spacing (mm)	080X060
Plate hole size (mm)	8,5X12
Offset (mm)	42
Ground clearance (mm)	155
Castor hole (mm)	/
Static load capacity (DaN)	170
Structure	Swivel
Version	Plate
Brake	/
Plain axle	/
Stem type	/
Finishing	Galvanized