

SERIE 601

# 601

**AVO - Wheel with avoprene polyurethane for industry, diameter 250mm ean 15136**

**Material:** Avoprene Polyurethane

**Core:** Electro-welded steel

**Application field:** Industry

**Description:**


Wheel coated with cast Polyurethane tread AVOPRENE 91 Shore A and electro-welded steel centre. Hub on shielded and sealed ball bearings.

**Product line:** Polyurethane

**EAN13:**8018793151368

**EAN5:**15136

**Article code:**0806012250LCA

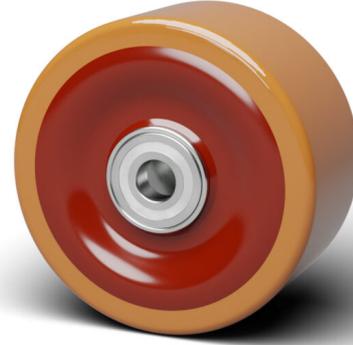

## Features

**Minimum temperature:** -20

**Maximum temperature:** 80

**Dynamic load capacity:** 2500 DaN

**Rotation:** Ball bearing

**Hardness scale:** Shore A

**Hardness:** 91

## Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

## Wheel data

Diameter (mm)	250
Band width (mm)	100
Hub width (mm)	100
Hub version	Ball bearing
Wheel hole (mm)	30
Bearing seat (mm)	62X17
Dynamic load capacity (DaN)	2500
Colour	Brown
Material	Avoprene Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

## Support data

Plate size (mm)	/
Plate hole spacing (mm)	/
Plate hole size (mm)	/
Offset (mm)	/
Ground clearance (mm)	/
Castor hole (mm)	/
Static load capacity (DaN)	/
Structure	/
Version	/
Brake	/
Plain axle	/
Stem type	/
Finishing	/