

SERIE 601

601

AVO - Wheel with avoprene polyurethane for industry, diameter 300mm ean 15139

Material: Avoprene
Polyurethane

Core: Electro-
welded steel

Application field:
Industry

Description:


Wheel coated with cast Polyurethane tread AVOPRENE 91 Shore A and electro-welded steel centre. Hub on shielded and sealed ball bearings.

Product line: Polyurethane

EAN13:8018793151399

EAN5:15139

Article code:0806011300XCA

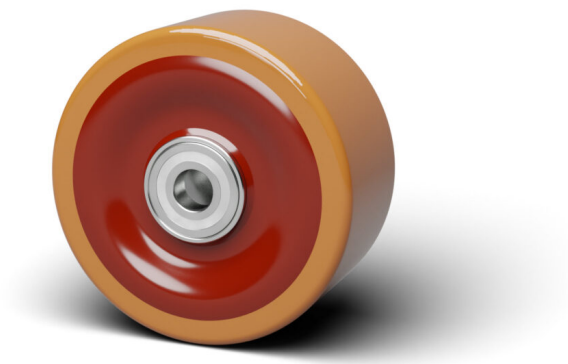

Features

Minimum temperature: -20

Maximum temperature: 80

Dynamic load capacity: 5000 DaN

Rotation: Ball bearing

Hardness scale: Shore A

Hardness: 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	300
Band width (mm)	160
Hub width (mm)	160
Hub version	Ball bearing
Wheel hole (mm)	40
Bearing seat (mm)	90X23
Dynamic load capacity (DaN)	5000
Colour	Brown
Material	Avoprene Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	/
Plate hole spacing (mm)	/
Plate hole size (mm)	/
Offset (mm)	/
Ground clearance (mm)	/
Castor hole (mm)	/
Static load capacity (DaN)	/
Structure	/
Version	/
Brake	/
Plain axle	/
Stem type	/
Finishing	/