

SERIE 601

601

AVO - Wheel with avoprene polyurethane for industry, diameter 300mm ean 15144

Material: Avoprene
Polyurethane

Core: Electro-
welded steel

Application field:
Industry

Description:


Wheel coated with cast Polyurethane tread AVOPRENE 91 Shore A and electro-welded steel centre. Hub on shielded and sealed ball bearings.

Product line: Polyurethane

EAN13:8018793151443

EAN5:15144

Article code:0806011300LCA

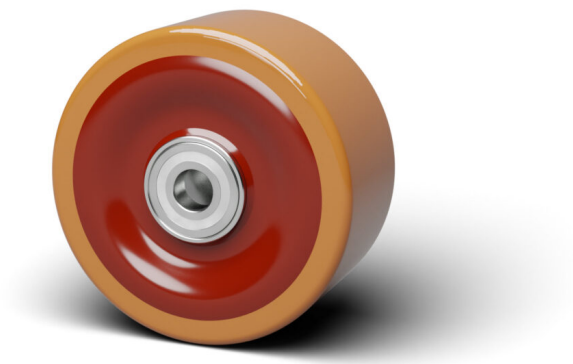

Features

Minimum temperature: -20

Maximum temperature: 80

Dynamic load capacity: 3000 DaN

Rotation: Ball bearing

Hardness scale: Shore A

Hardness: 91

Flooring

- Asphalt
- Concrete
- Grid
- Stoneware

Wheel data

Diameter (mm)	300
Band width (mm)	100
Hub width (mm)	100
Hub version	Ball bearing
Wheel hole (mm)	30
Bearing seat (mm)	72X19
Dynamic load capacity (DaN)	3000
Colour	Brown
Material	Avoprene Polyurethane
Box pieces	/
Hardness scale	Shore A
Hardness	91

Support data

Plate size (mm)	/
Plate hole spacing (mm)	/
Plate hole size (mm)	/
Offset (mm)	/
Ground clearance (mm)	/
Castor hole (mm)	/
Static load capacity (DaN)	/
Structure	/
Version	/
Brake	/
Plain axle	/
Stem type	/
Finishing	/