

SERIE 16NX

## 66XANT

**AVO - Wheel with cut-resistant rubber tyre and aisi 304 stainless steel castor for industry, diameter 125mm ean 17187**

**Material:** Cut-resistant  
Rubber tyre

**Core:** Polyamide  
6

**Application field:**  
Industry

**Description:**

Blue elastic cut-resistant rubber wheel 68 Shore A with black polyamide 6 centre.  
Hub on stainless steel roller bearings.

**Medium duty castors:**


Made of pressed steel AISI 304, turning on double rim of stainless-steel balls  
AISI 420, with plate and front brake. Dust cover ring on the balls.

**Product line:** Stainless steel

**EAN13:**8018793171878

**EAN5:**17187

**Article code:**00X660A126NRB

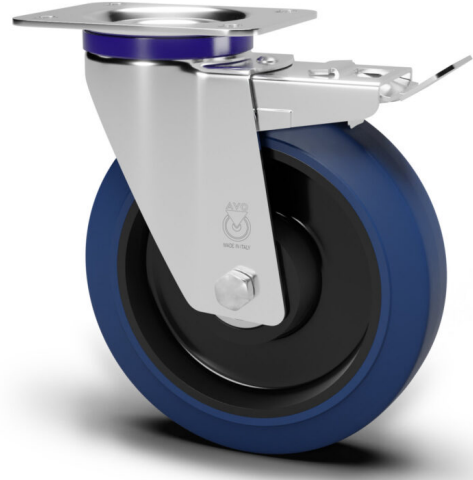

## Features

**Minimum temperature:** -20

**Maximum temperature:** 70

**Dynamic load capacity:** 170 DaN

**Rotation:** Stainless steel roller bearing

**Hardness scale:** Shore A

**Hardness:** 68

## Flooring

- Stoneware
- Wood

## Wheel data

|                             |                                |
|-----------------------------|--------------------------------|
| Diameter (mm)               | 125                            |
| Band width (mm)             | 36                             |
| Hub width (mm)              | 50                             |
| Hub version                 | Stainless steel roller bearing |
| Wheel hole (mm)             | 15                             |
| Bearing seat (mm)           | /                              |
| Dynamic load capacity (DaN) | 170                            |
| Colour                      | Blue                           |
| Material                    | Cut-resistant Rubber tyre      |
| Box pieces                  | /                              |
| Hardness scale              | Shore A                        |
| Hardness                    | 68                             |

## Support data

|                            |                          |
|----------------------------|--------------------------|
| Plate size (mm)            | 100X085                  |
| Plate hole spacing (mm)    | 080X060                  |
| Plate hole size (mm)       | 8,5X12                   |
| Offset (mm)                | 42                       |
| Ground clearance (mm)      | 155                      |
| Castor hole (mm)           | /                        |
| Static load capacity (DaN) | 220                      |
| Structure                  | Swivel                   |
| Version                    | Plate with brake         |
| Brake                      | Front                    |
| Plain axle                 | /                        |
| Stem type                  | /                        |
| Finishing                  | AISI 304 stainless steel |