

SERIE 116-PS

137BIS-PA

AVO - Wheel with polyamide 6 and steel castor for industry,
diameter 300mm ean 28267

Material: Polyamide 6 **Core:** Polyamide 6 **Application field:** Industry

Description:


Heavy polyamide 6 wheel. Hub on shielded ball bearings assembled with central spacer.

Twin Wheel Extra Heavy-Duty Castors:

Made of pressed and welded high thickness steel, turning on thrust and tapered roller bearings, with plate and rear brake. Black epoxy paint.

Product line: Polyamide

EAN13:8018793282673 **EAN5:**28267 **Article code:**051370F301SCN

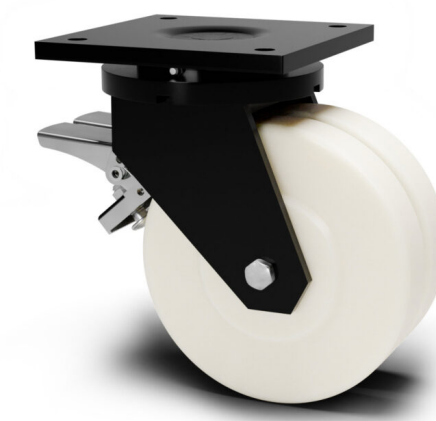

Features

Minimum temperature: -25 **Maximum temperature:** 85 **Dynamic load capacity:** 4000 DaN
Rotation: Ball bearing **Hardness scale:** Shore D **Hardness:** 82

Flooring

- Concrete
- Stoneware

Wheel data

Diameter (mm)	300
Band width (mm)	70
Hub width (mm)	70
Hub version	Ball bearing
Wheel hole (mm)	30
Bearing seat (mm)	62X16
Dynamic load capacity (DaN)	4000
Colour	White
Material	Polyamide 6
Box pieces	/
Hardness scale	Shore D
Hardness	82

Support data

Plate size (mm)	230X230
Plate hole spacing (mm)	190X190
Plate hole size (mm)	19
Offset (mm)	83
Ground clearance (mm)	375
Castor hole (mm)	/
Static load capacity (DaN)	5000
Structure	Swivel
Version	Plate with brake
Brake	Rear
Plain axle	/
Stem type	/
Finishing	Black painted